


## Non-conductive Zenex™ padlock range - S32

Lockout padlocks designed exclusively for lockout and tagout by personnel in charge of lockout or safety at work.

- ✓ Zenex™ 4.76mm diameter shackle
- ✓ 38mm standard height
- ✓ 48mm Zenex™ composite body
- ✓ Non-conductive, non-magnetic, non sparking padlock
- ✓ Corrosion, chemical & solvent resistant
- ✓ Withstands temperatures ranging from -57°C to +177°C.
- ✓ UV-stable padlock body
- ✓ Padlock option: keyed-different (KD), keyed alike(KA), master-keyed (MK)
- ✓ Cylinders available: W401(KA/KD) and W407(MK) ;  
Key system compatible with 410's & S31-S33 range
- ✓ Supplied with a single key
- ✓ Body sides and faces can be laser-engraved for permanent identification
- ✓ Non-key-retaining
- ✓ Includes «Danger» and «Property of» padlock labels, available in French, English and Spanish
- ✓ 9 body colors available

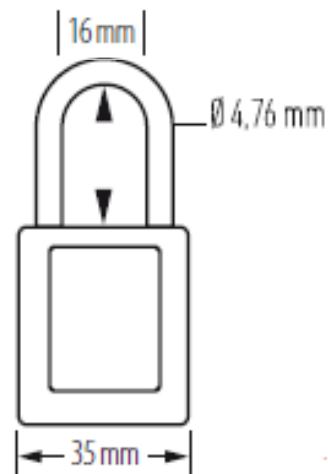

### Technical specifications

- Zenex™ 4.76mm diameter shackle
- 38mm standard height
- 48mm Zenex™ composite body
- Withstands temperatures ranging from -57°C to +177°C.
- UV-stable padlock body
- Padlock option: keyed-different (KD), keyed alike(KA), master-keyed (MK)
- Cylinders available: W401(KA/KD) and W407(MK)
- Non-key-retaining