


# Product Data Sheet

**Master**  
**SAFETY SERIES™ Lock.**

## Non-conductive lockout padlock - 406

Lockout padlock designed exclusively for lockout and tagout by personnel in charge of lockout or safety at work.

- ✓ Complies with **UTE C18-510** relating to electricity, **OSHA 1910.147** relating to lockout devices and **BS7671:2008 (Sections 537.2.2.4 & 537.3.1.2)** on working conditions and equipment relating to protection against unintentional or unauthorised operation
- ✓ The sides and faces of the body can be laser-engraved for permanent identification with worker, department or shift name or telephone number
- ✓ All padlock components are non-conductive
- ✓ "Danger" and "Property of" labels in French, English and Spanish included.  
Other languages available on request. S141 identification labels available in 13 languages.

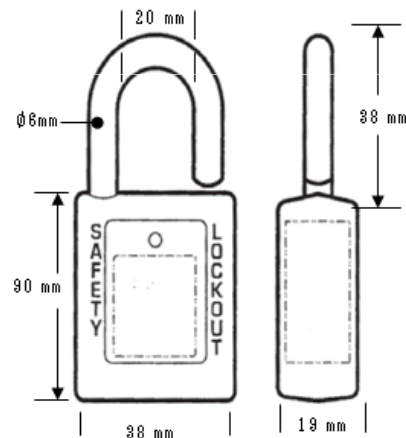

8 colours available



### Technical specifications

- Body and shackle made from non-sparking dielectric composite
- Withstands temperatures from -57°C to 177°C
- Thermal shock, chemical and corrosion resistant
- UV stable
- Silicone-free padlock
- Nylon shackle Ø 6 mm; height 38 mm
- Key system in accordance with OSHA 1910.147: **1 worker - 1 padlock - 1 key**  
Keyed-different (KD), keyed-alike (KA), master-keyed (MK)
- Key monitoring system ensures that duplicates cannot be made
- Key-retaining device ensures that padlock cannot be left unlocked accidentally

Master Lock Europe SAS - World Wide Contact - 131, avenue Charles de Gaulle 92200 Neuilly sur Seine - Tel. +33 1 41 43 72 00  
Website: [www.safetyseries.eu](http://www.safetyseries.eu) Email: [safeteyeu@mlock.com](mailto:safeteyeu@mlock.com)

Master Lock Europe SAS - UK Only - Unit 12 Wakes Hall Business Centre, Colechester Road CO6 2DB UK - Tel. : +44 1 787 222 027  
Website: [www.safetyseries.co.uk](http://www.safetyseries.co.uk) Email: [sales\\_uk@mlock.com](mailto:sales_uk@mlock.com)