


## Zenex™ lockout padlock - S31-S33

Lockout padlocks designed exclusively for lockout and tagout by personnel in charge of lockout or safety at work.

- ✓ Complies with **UTE C18-510** relating to electricity, **OSHA 1910.147** relating to lockout devices and **BS7671:2008 (Sections 537.2.2.4 & 537.3.1.2)** on working conditions and equipment relating to protection against unintentional or unauthorised operation
- ✓ The sides and faces of the body can be laser-engraved for permanent identification with worker or shift name or telephone number
- ✓ "Danger" and "Property of" labels in French, English and Spanish included. Other languages available on request. S142 labels available with identification photo

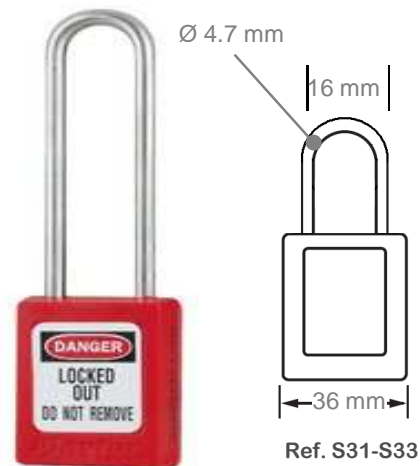

9 colours available



### Technical specifications

- **Zenex™** composite body and **stainless steel** shackle
- Withstands temperatures from **-57°C to 177°C**
- Thermal shock, chemical and corrosion resistant
- UV stable
- Silicone-free padlock
- Steel shackle Ø 4.7 mm; standard height 38 mm or long shackle 76 mm
- Shackle can withstand tensile loads of over 136 kg
- S31: key-retaining
- S33: non-key-retaining
- Key system in accordance with OSHA 1910:147:  
**1 worker - 1 padlock - 1 key**  
Keyed-different (KD), keyed-alike (KA), master-keyed (MK)
- Key monitoring system ensures that duplicates cannot be made

*Zenex™ is a registered trademark of Master Lock®*