


Keypad Deadbolt - Quick Reference for Programming Functions:

Step 1 Remove battery cover - Press and hold PROGRAM button until blue light flashes.

Step 2 Enter the data in the row below based on what you want to do.

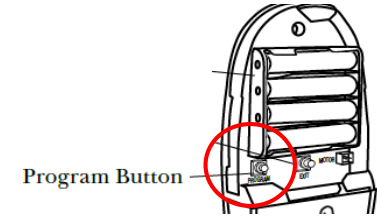

Steps >	2a	2b	2c	2d	2e	2f	2g	
Function	Enter Admin code (from page 2 in User Guide)	Press Function Button	Press Enter	Enter	Press Enter	Data Confirmation	Press Enter	Programming completed.
Add a User Code	Admin Code	1-2	ENTER	New 4 to 10 digit User Code	ENTER	New 4 to 10 digit User Code	ENTER	Green light is good / Red light restart at step 1.
Remove a User Code	Admin Code	3-4	ENTER	User Code to be removed	ENTER	User Code to be removed	ENTER	
Change Admin Code	Admin Code	5-6	ENTER	New 6 digit Admin Code	ENTER	New 6 digit Admin Code	ENTER	
Delete All User Codes	Admin Code	7-8	ENTER	Current Admin Code	ENTER	ENTER		ENTER
						Green light is good / Red light restart at step 1.		
Deactivate / Reactivate All user codes	Admin Code	9-0	ENTER	ENTER				ENTER
						Green light is good / Red light restart at step 1.		
We recommend confirming changes by testing code after programming is complete.								